부호	내 용	년월일	설계	검도	승인

SPECIFICATION

CAPACITY		500	KG
WEIGHT		530	
FORK LENGTH		850	MM
LIFTING HEIGHT		290~4210	
FORK WIDTH		1000~1500	
OVERALL LENGTH		1650	
OVERALL HEIGHT		1995	
OVERALL WIDTH		1000	
CYLINDER	SIDE	⌀40x1265st	
	CENTER	⌀70x695st	
	TILT	⌀30x100st	
FRONT WHEEL		⌀150	
REAR WHEEL		⌀130	
BATTERY		24Vx70Ah/5hr(LITHIUM)	
BATTERY CHARGER		AC 1⌀x100V 50/60Hz	
COLOR		POWDER COATING	

※NOTE

1. 操作盤 : BUTTON TYPE - TOUCH TYPE
2. Down Speed Control Valve 付(F-400)
3. 警告灯 : UP-DOWN 動作中にパトライト作動
4. 前輪 : 90° 移動 (油圧シリンダー)
   CONTROL BOX上の SELECT S/W 操作
   (直進 0° - GREEN LAMP, 直角 90° - RED LAMP 表示)
5. FORK上の STOPPER : RACHET方式
   (FORK前面 : 位置変更可能)
6. 500KG 超過でリフト不可
   POWER PACKのRELIEF圧力を 500KG で設定。
7. 4軸 (X,Y)ベルセンサー取付。 いずれも傾斜2°
   検出時に昇降不可。
   - 操作パネル上に水平器取付。
8. OUTTRIGGER : FLOOR LOCK (足踏み) TYPE
9. FORK地面より1.5m 上昇時に走行機能制限
10. PAINT仕様 : BODY 及び MAST - BLUE,
    FORK 及び ATTACH - DARK GRAY,
    HANDLE, DRIVE - DARK GRAY
11. マスト上端に吊り上げ用ラグ (2点) 取付。 (溶接)
12. LASER LINE MARKER 取付 (固定式)
    - One touch type(5分作動後に自動消灯)
13. 昇降方式 : FULL FREE STYLE LIFTING
14. 安全保護 : PCアクリル取付

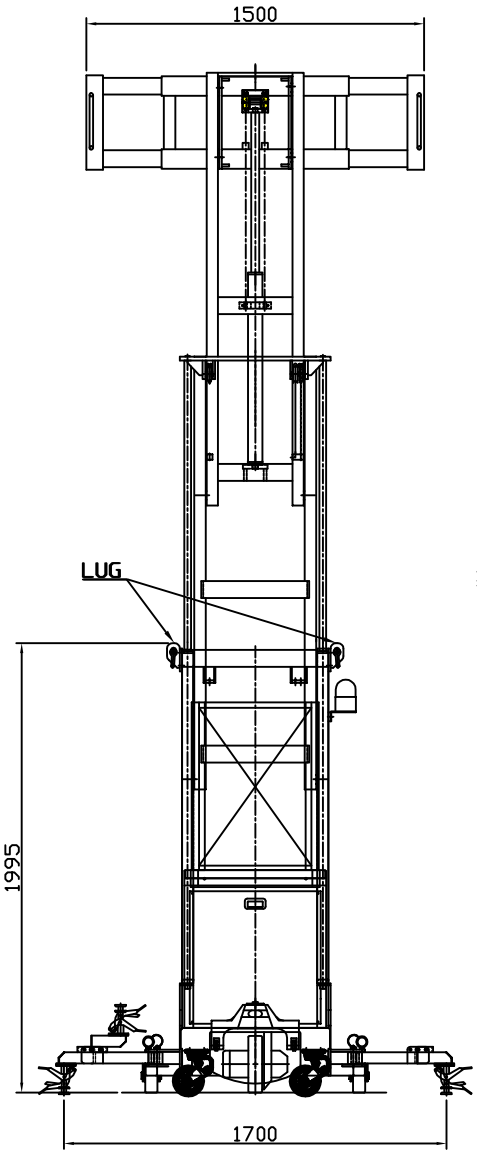

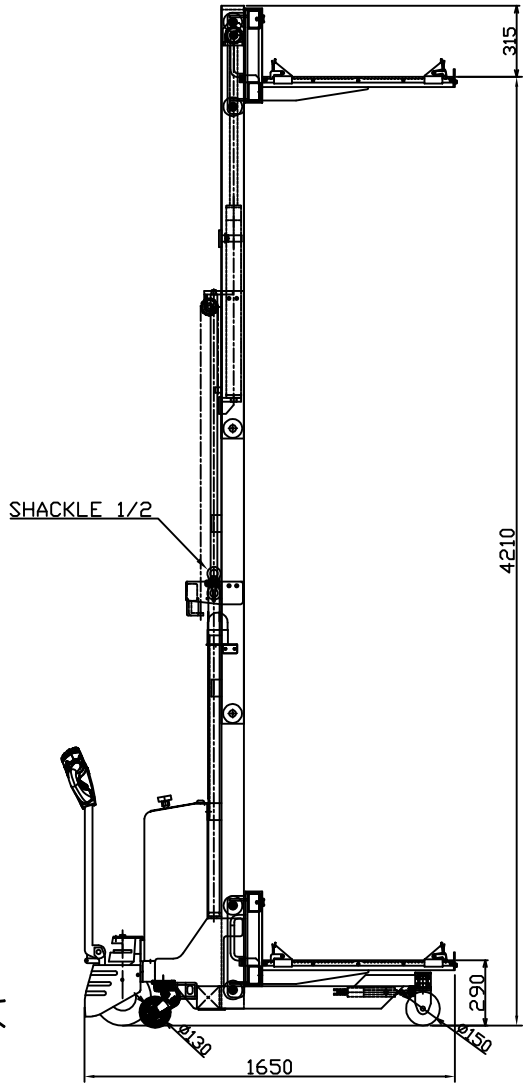

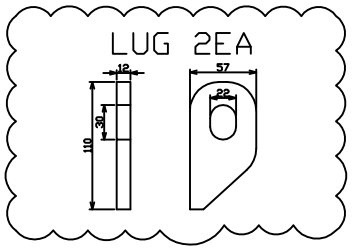

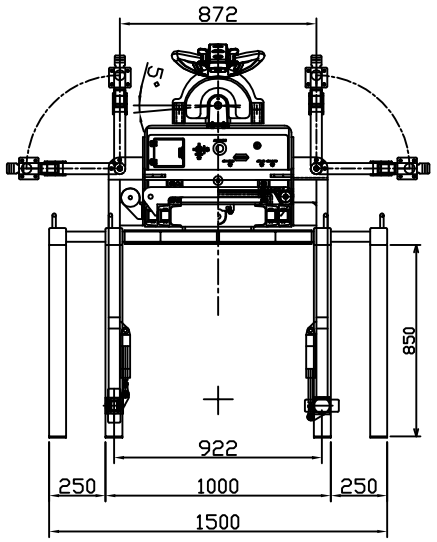

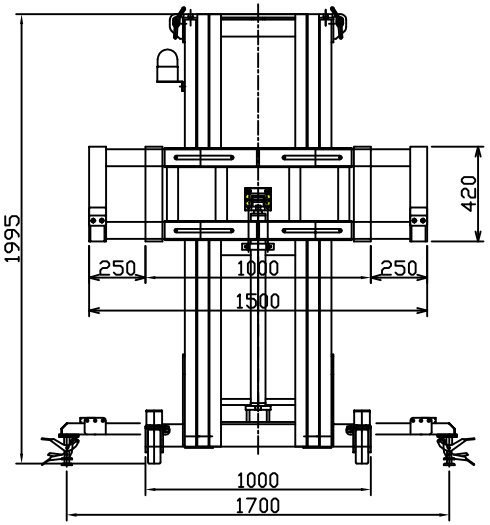

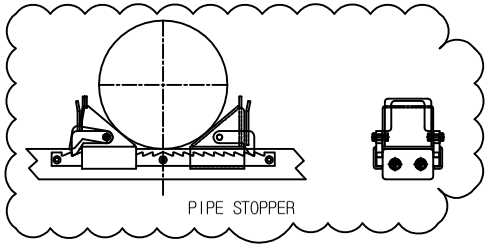

MODEL	APL2-500-4				NAME	ASSEMBLY	
DROW NO.	AC-0001-00				ORDER	STANDARD	CAD FILE NAME
DATE	20190624	SCALE	1:1		UNIT	mm	
▽▽▽▽ 0.8S , ▽▽▽ 6.3S , ▽▽ 25S , ▽ 100S					PROJECTION METHODS		
APPROVED	CHECKED	CHECKED	DESIGNED	DRAWN	AMKO		
-	-	C.S.Kim	C.S.Kim	C.S.Kim			