부호	내 용	년월일	설계	검도	승인

SPECIFICATION

CAPACITY		200	KG
WEIGHT		890	
FORK LENGTH		1200	MM
LIFTING HEIGHT		340~6035 (535~6230)	
FORK WIDTH		1000~1500	
OVERALL LENGTH		2398 (2809)	
OVERALL HEIGHT		2675 (2316)	
OVERALL WIDTH		1030	
CYLINDER	CENTER	⌀70x1040st	
	SIDE	⌀40x1815st	
	TILT	⌀30x100st	
	REACH	⌀40x310st	
FRONT WHEEL		⌀150	
REAR WHEEL		⌀130	
BATTERY		24Vx150Ah/5hr(LITHIUM)	
BATTERY CHARGER		AC 1⌀x100V 50/60Hz	
COLOR		POWDER COATING	

※NOTE

1. 操作盤 : BUTTON TYPE - TOUCH TYPE
2. Down Speed Control Valve 付(F-400)
3. 警告灯 : UP-DOWN 動作中にパトライト作動
4. 前輪 :90° 移動 (油圧シリンダー)
   CONTROL BOX上の SELECT S/W 操作
   (直進 0°- GREEN LAMP, 直角 90°- RED LAMP 表示)
5. FORK上の STOPPER : RACHET方式
   (FORK前面 : 位置 変更可能)
6. 350KG 超過でリフト不可
   POWER PACKのRELIEF圧力を 350KG で設定。
7. 4軸 (X,Y)ベルセンサー取付。 いずれも傾斜2°
   検出時に昇降不可。
   - 操作パネル上に水平器取付。
8. OUTRIGGER : FLOOR LOCK (足踏み) TYPE
9. FORK地面より2370mm 上昇時に走行機能制限
10. PAINT仕様 : BODY 及び MAST - BLUE,
    FORK 及び ATTACH - DARK GRAY,
    HANDLE, DRIVE - DARK GRAY
11. マスト側面に吊上げ用ラグ (2点) 取付。(溶接)
    吊り上げ時には必ずマストを斜めに倒して下さい。
12. LASER LINE MARKER 取付 (固定式)
    - One touch type(5分作動後に自動消灯)
13. 昇降方式 : FULL FREE STYLE LIFTING
14. 安全保護 : PCアクリル取付
15. 詳細設計時に性能向上を目的とする、諸元や寸法の若干の 変更が生じることもありますので、御了承願います。

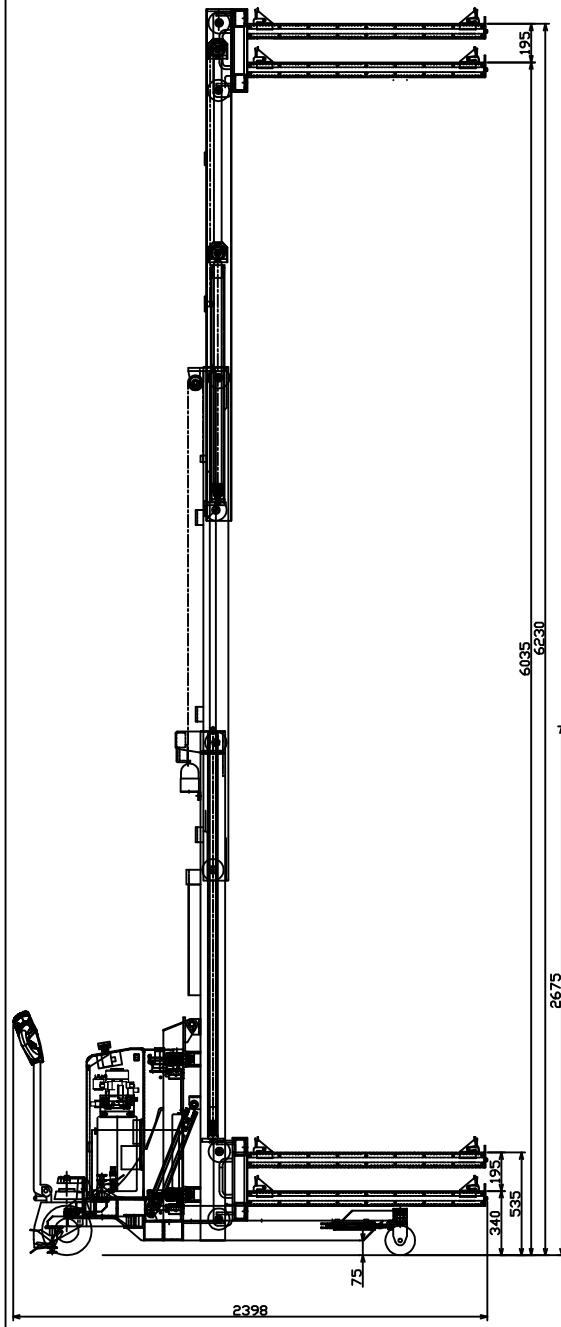

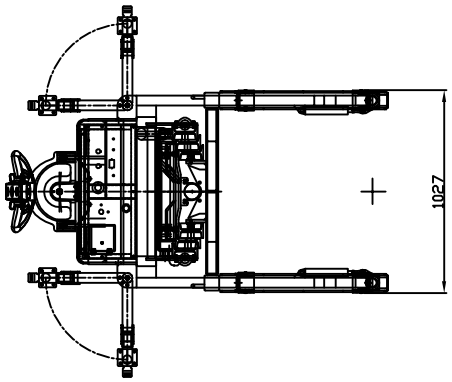

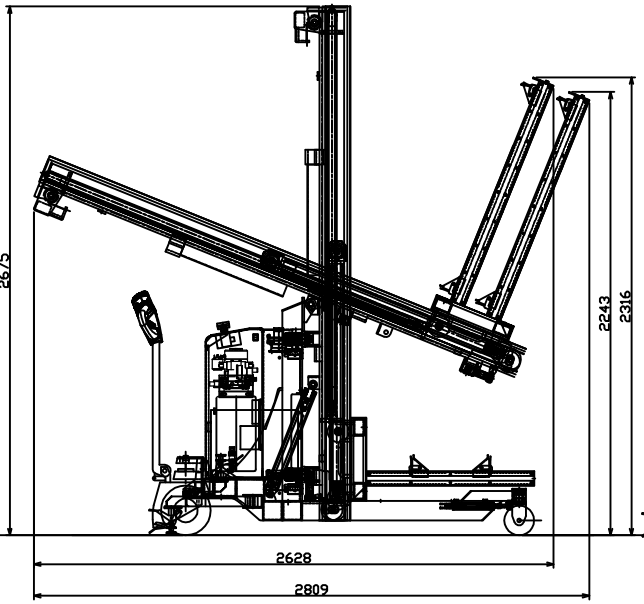

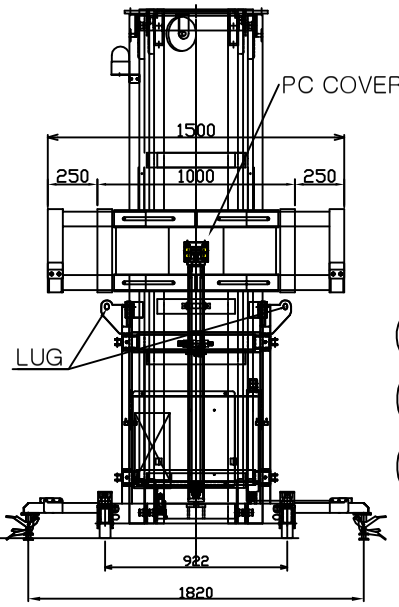

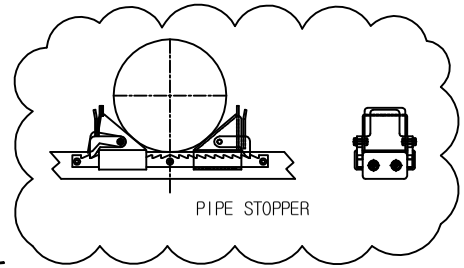

MODEL	APL-350-6			NAME	ASSEMBLY	
DROW NO.	AC-0003-00			ORDER	STANDARD	CAD FILE NAME
DATE	20200323	SCALE	1:1	UNIT	mm	
▽▽▽▽ 0.8S , ▽▽▽ 6.3S , ▽▽ 25S , ▽ 100S				PROJECTION METHODS		

APPROVED	CHECKED	CHECKED	DESIGNED	DRAWN	
-	-	C.S.Kim	C.S.Kim	C.S.Kim	AMKO