
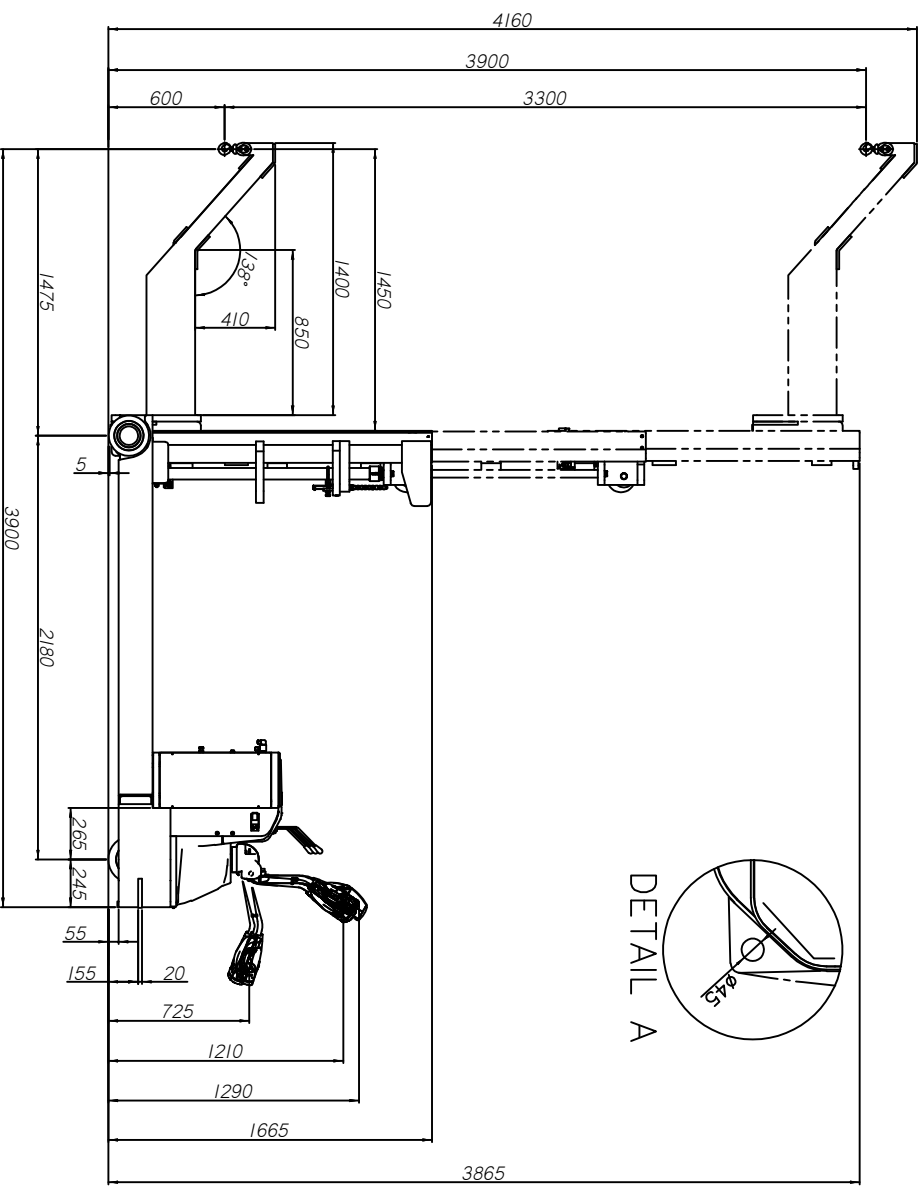


NO.	DESCRIPTION	DIMENSION	MATERIAL	QTY	WEIGHT	REMARKS
-----	-------------	-----------	----------	-----	--------	---------

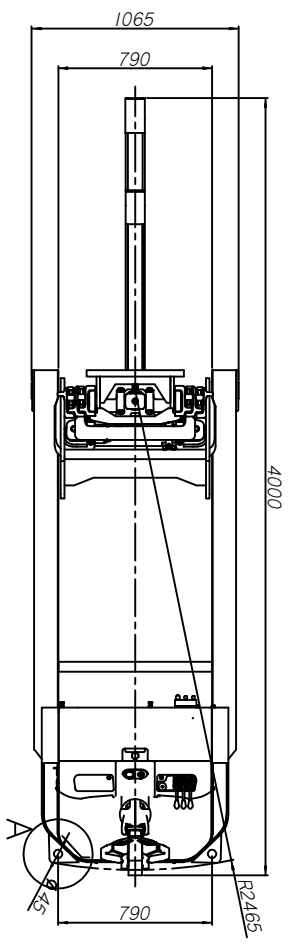

SPECIFICATIONS

MODEL	SMR-1300L AC/EPS		
CAPACITY	800		KG
SELF WEIGHT	1900		KG
LIFTING HEIGHT	600 - 3900		MM
LOAD CENTER	1450		MM
TURNING RADIUS	2465		MM
WHEEL BASE	2180		MM
CLIMBING CAPACITY	10	%	
OVERALL LENGTH	3930		MM
OVERALL HEIGHT	1665		MM
OVERALL WIDTH	1080		MM
CYLINDER	CENTER	φ80x550 st	
	LIFT	φ45x1100 st(2 EA)	
LIFTING SPEED	EMPTY	80	MM/SEC
	LOADED	55	MM/SEC
TRAVEL SPEED	EMPTY	4 ~ 5	KM/H
	LOADED	3 ~ 4	KM/H
DRIVE MOTOR	AC 16Vx1.5kW		
HYDRAULIC MOTOR	24Vx2.2kW		
EPS MOTOR	24Vx0.4kW		
BATTERY	24Vx268 AH/5HR		
BATTERY CHARGER	AC 1φx100V 60Hz / 50Hz		

※NOTE

1. 使用荷重：800kg
2. 上昇高さ：3500mm(ツック先端基準)
3. 軸荷重
 - 負荷無し
 - 前輪 445.5kg / 1個, 後輪 977kg / 1個
 - 負荷有り
 - 前輪 1180.5kg / 1個, 後輪 307kg / 1個
4. 上昇速度(3900mm 上昇時)
 - 負荷無し：62秒
 - 負荷有り：42秒
5. ハンドル操作：電動/マスレ



REVISION	DATE	DESIGNED	CHECKED	APPROVED	REMARKS
1					
2					
3					
4					
5					
6					
7					
8					
DIMENSION		WALL LIFTER / ALC-800		ASSEMBLY	
TITLE OF PROJECT		ELECTRIC LIFT TRUCK		TE00100100-RE3	
DRAWN		CHECKED		DOIN	
USH		LSM		LSM	
DATE		SCALE		PROJECTION	
200731		1/10		3RD ANGLE	